



Your Solutions Partner

Specifications

F.O.B Sedalia, Missouri 65301



ADI-3MSL

OPTIONS:

- ☐ Condensate Evaporator
- ☐ 220V - 50Hz compressor
- ☐ Hot food style top
- ☐ Stainless steel louvered grille
- ☐ False Bottom
- ☐ Designer Foodshields
- ☐ Stainless steel adapter panels
- ☐ Adapter bars

AGENCY LISTING:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Drop-Ins - Slimline - Cold Pan

Mechanically Assisted Ice Pan - 5" Deep Liner

- ☐ **ADI-2MSL** Holds (2) 4" Deep 12" x 20" pan
- ☐ **ADI-3MSL** Holds (3) 4" Deep 12" x 20" pan

TOP RIM:

- Heavy gauge, 300 Series stainless steel
- Overhang on all four sides w/locking tabs
- Reinforced with heavy gauge steel angle
- Vinyl foam gasket as sealant

LINER:

- 300 Series stainless steel cold pan
- 5" deep 11-7/8" front to back
- 1" cast brass drain and plug
- Adapter bars for full size pans included

REFRIGERATION:

- Copper coils attached to bottom of liner - R134A refrigerant
- Air cooled condensing unit, in center of unit
- Open angle-iron suspended compressor compartment
- Remote mounted on/off switch with stainless steel face plate
- 120V condensing unit
- 6' cord and plug - NEMA 5-15
- Five year warranty on compressor motor

EXTERIOR HOUSING

- Heavy gauge paint grip steel

SHORT FORM SPECIFICATIONS:

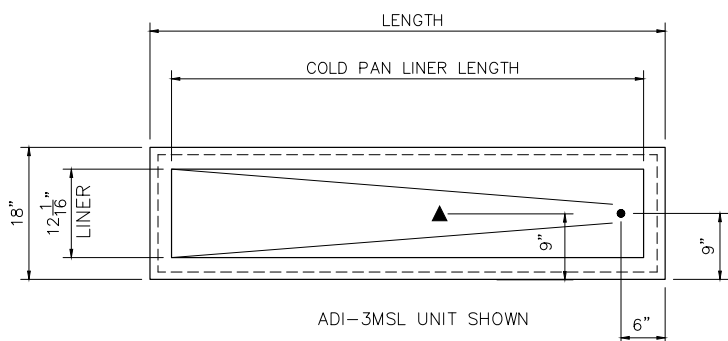
Duke Drop-Ins - Slimline - Cold Pan - Mechanically Assisted Ice - 5" Deep Liner.

Top flange of heavy gauge 300 series s/s with overhang on 4 sides, refrigerated cold pan, s/s top and interior liner, heavy gauge paint grip steel exterior housing, with drain, remote mounted on/off switch, 5" deep liner, cord and plug, adapter bars for full size pans furnished. Note: Do not fully enclose compressor area. Two unrestricted openings of no less than 200 sq. inches required in cabinet for proper cooling.

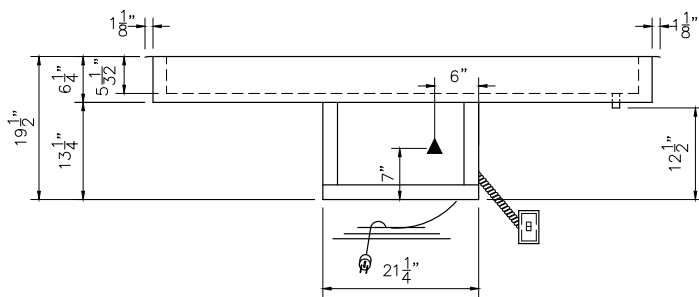

Duke®

MODEL:**Drop-Ins - Slimline - Cold Pan****Mechanically Assisted Ice Pans- 5" Deep Liner**

- ☐ **ADI-2MSL** (2) 4" Deep 12" x 20" pans
☐ **ADI-3MSL** (3) 4" Deep 12" x 20" pans

**TOP VIEW**

LEGEND
▲ - ELECTRICAL CONNECTION
● - DRAIN CONNECTION

**FRONT VIEW****RIGHT SIDE VIEW****DIMENSIONS** - Liners are 11-7/8" (30.3 cm) W; cutouts 16-3/4" (42.3cm) W

FREIGHT CLASS: 100

Model	Length		Width		Height		Cube ft crated	Adapt- er Bars	Weight		Cold Pan - L		Cutout - L	
	in.	cm	in	cm	in	cm			lbs	kg	in	cm	in	cm
ADI-2MSL	48 ¼	122.6	18	45.7	19 ½	46.4	18.1	1	155	70.5	42 ¼	107.3	47	121.9
ADI-3MSL	70 ¼	178.4	18	45.7	19 ½	46.4	25.5	2	205	93.2	64 ¼	163.2	69	178.0
REMOTE CONTROL CUTOUT IS 4-1/8" H X 2-3/16" W														

ELECTRICAL SPECIFICATIONS

Model	120 Volt	
	Amps	HP
ADI-2MSL	4.2	1/5
ADI-3MSL	4.2	1/5

**DUKE MANUFACTURING CO.**

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Specification subject to change

01/11
Printed in U.S.A
© 2011, Duke Manufacturing Co.